

## Weitzer Block 750

### 2-layer engineered parquet

Dimensions: 750 x 125 x 9,3mm

Installation methods:



### Functionalities:



**MAINTENANCE-FREE PARQUET** - PROACTIVE+: For residential use the complicated and time-consuming maintenance is no longer required




**HEALTHY PARQUET** - PROVITAL finish: Allergy-friendly, Antibacterial, breathable and antistatic properties



**SOUND-REDUCTION PARQUET**: ambient noise drastically reduced at full adhesion

### Laying patterns:

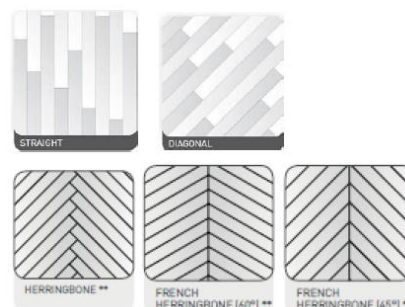

### Product description:

|                              |                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Place of production          | Austria                                                                                                                                                                                                                                                                                                                                         |
| Total thickness              | 9,3mm. 2-layer construction                                                                                                                                                                                                                                                                                                                     |
| Wear layer                   | approx. 2,7mm solid wood                                                                                                                                                                                                                                                                                                                        |
| Supporting material          | wood-based material                                                                                                                                                                                                                                                                                                                             |
| Profiling                    | 4-side tongue and groove. 1-strip                                                                                                                                                                                                                                                                                                               |
| Moisture content             | long seasoned and kiln-dried wood (moisture content at delivery 8% ± 1%)                                                                                                                                                                                                                                                                        |
| Under-floor heating          | suitable (refer to Technical Datasheet MB020)                                                                                                                                                                                                                                                                                                   |
| Fire resistance EN 13501-1   | C <sub>fl</sub> -s1 for wood type oak with surface ProActive+ or ProVital finish<br>(fire resistance of other wood types on request, please pay attention to the conditions for installation)                                                                                                                                                   |
| Heat conductivity resistance | 0,055 m <sup>2</sup> K/W                                                                                                                                                                                                                                                                                                                        |
| Renovation                   | multiple sanding possible                                                                                                                                                                                                                                                                                                                       |
| Hardness                     | 25-41 N/mm <sup>2</sup> (depending on the type of wood, measured perpendicular to the grain)                                                                                                                                                                                                                                                    |
| Ecological responsibility    |     |

### Surfaces:



#### PROACTIVE+ – THE NATURAL MATT SURFACE

Maintenance-free for private living areas. Matt lacquered surface with the look of a natural oiled surface. Antistatic and with antibacterial properties. Corresponds to stress class C according to ÖNORM C 2354 for particularly heavy use in terms of scratch resistance and chemical resistance. Meets standard requirements according to EN 425 in chair roll test. Slip resistance class R 10 acc. to DIN 51130.



#### PROVITAL finish – THE NATURAL OILED SURFACE

Pure natural oils that penetrate deep into the pores, giving the parquet a special protection. Particularly breathable. Repairable as a whole or on single spots. Factory-finished oiled surface for private living areas (finish) - for use in public areas additional finish application after installation is mandatory. Natural coating material in accordance with ÖNORM C 2380. Slip resistance class R 10 according to DIN 51130.

### Intelligent characteristics:

- Multiple design possibilities incl. herringbone (90°) and French herringbone\*\* (45° and 60°)
- Wooden stairs WP MULTI – Parquet and stairs from a single source ensure the best possible color uniformity

### Concluding remarks:

Dimensional data and technical characteristics of wood may be subject to minor deviations due to material or production technology. PEFC/FSC on request. Any change to the product after delivery can lead to changes in the declared product properties (e.g. fire behavior or slide properties) and the contractor is not liable for this. Change in R-value possible depending on haptic characteristics, care films and cleaning residues. (for some patterns, left and right block-elements must be ordered separately for certain items). \*\* For the French herringbone version: total bar length approx. 9mm shorter. Latest technical state 07-2026.